


Wireless charger

Wireless charger connected to control box by using included Y-cable for handset

Dimension	Ø66*21(H)
Weight	168g
Output current	1.0A max
Output Voltage	4.7-5.3V
Input current	1.5A max
Input Voltage	4.7-5.3V
Efficiency	60%
Qi charging power	7.5W
Charger Type	Qi-Enabled
Transmit Distance	≤5mm

Drawing

Standard dimension (mm)

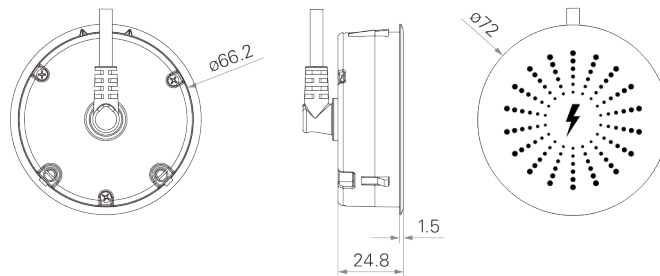

Reset

First time a desk is assembled and taken into use, the desk must be reset!

Press both ▲ ▼ buttons at the same time for 3 seconds. Continue pressing the buttons ▲ ▼ until both columns are in lowest position. When finish reset, the control box makes a beep and the buttons can be released. Now the system is operational.

If the desk is disconnected by accidently pulling out the plugs at the control box, motors, handset, main power source or system status reach overload, overheat etc. then the desk must be reset.

If the desk is powered off intentionally at the main power switch, then the desk does not need to be reset.

Standard colors

Jet black
RAL 9005

White aluminium
RAL 9006

Traffic white
RAL 9016

